
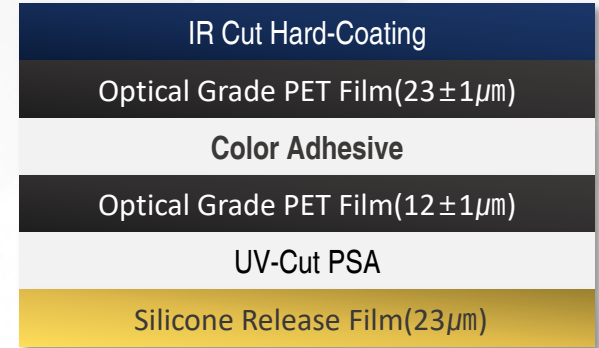




# GLASSTINT-Pender05

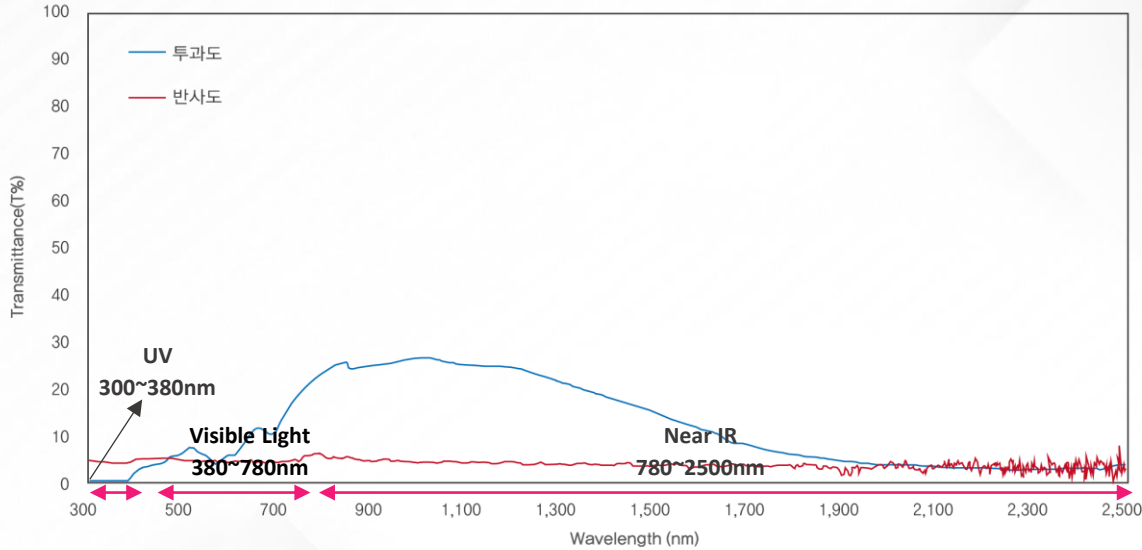

Visible Light Transmitted		6%	KS L 2514
Visible Light Reflected		4.8%	KS L 2514
Solar Heat	Transmitted	14.8%	KS L 2514
	Reflected	4.8%	
	Absorbed	80.4%	
IR Rejected	900~1000nm	72%	KS L 2514
	780~2500nm	85%	
UV Rejected		99%↑	KS L 2514
Total Solar Energy Rejected (TSER)		59%	KS L 2514

Thickness	1.5Mil/2Ply	
Shading Coefficient	0.48	KS L 2016
Solar Heat Gain Coefficient (SHGC)	0.43	KS L 2514
Scratch Resistant	>2H	ASTM D3363
Adhesion of Hard-Coated Surface	5B (0% peel-off)	ASTM D3359



# GLASSTINT-Pender15

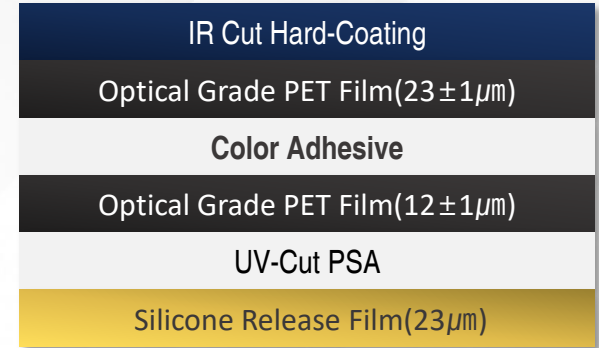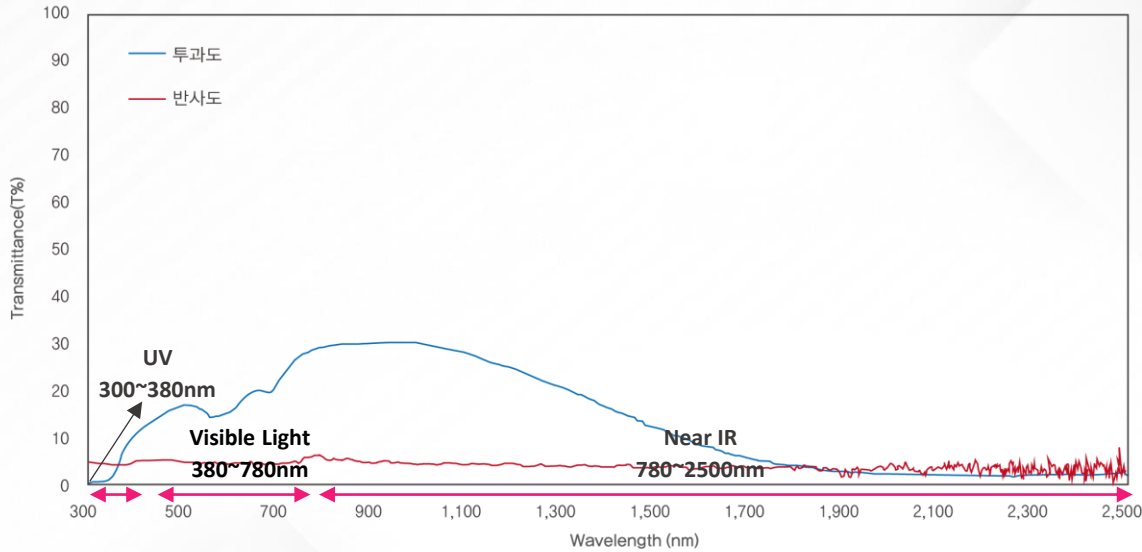

Visible Light Transmitted		15%	KS L 2514
Visible Light Reflected		5.2%	KS L 2514
Solar Heat	Transmitted	20.1%	KS L 2514
	Reflected	4.9%	
	Absorbed	75%	
IR Rejected	900~1000nm	70%	KS L 2514
	780~2500nm	87%	
UV Rejected		99%↑	KS L 2514
Total Solar Energy Rejected (TSER)		55%	KS L 2514

Thickness	1.5Mil/2Ply	
Shading Coefficient	0.52	KS L 2016
Solar Heat Gain Coefficient (SHGC)	0.46	KS L 2514
Scratch Resistant	>2H	ASTM D3363
Adhesion of Hard-Coated Surface	5B (0% peel-off)	ASTM D3359



# GLASSTINT-Pender35

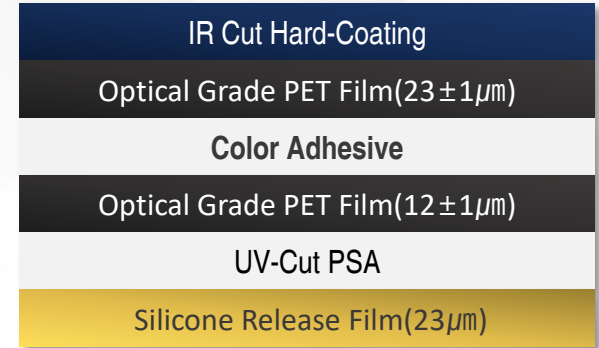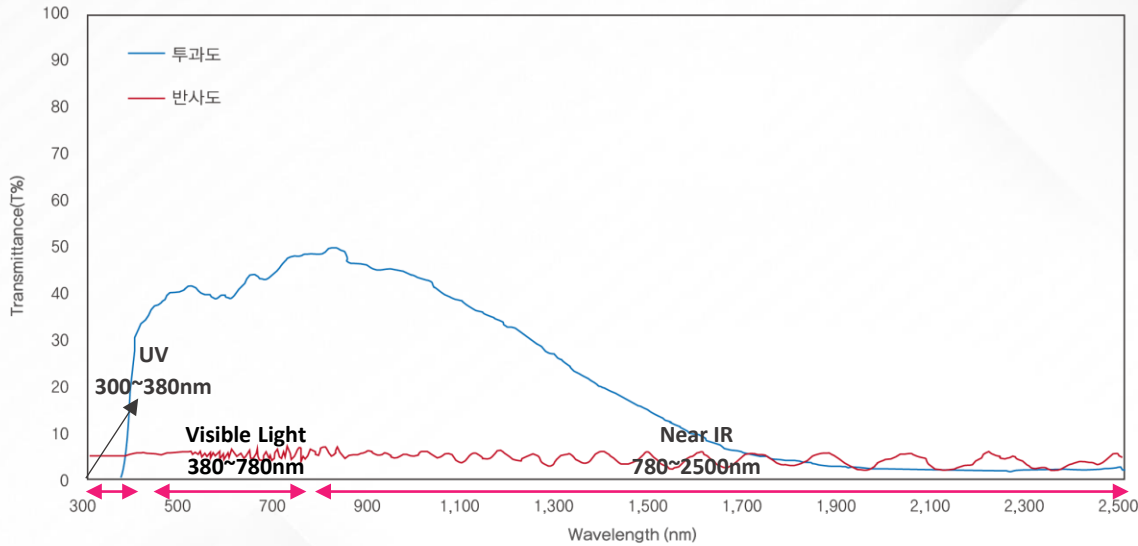

Visible Light Transmitted		40%	KS L 2514
Visible Light Reflected		5.4%	KS L 2514
Solar Heat	Transmitted	37.1%	KS L 2514
	Reflected	5.2%	
	Absorbed	57.7%	
IR Rejected	900~1000nm	55%	KS L 2514
	780~2500nm	83%	
UV Rejected		99%↑	KS L 2514
Total Solar Energy Rejected (TSER)		46%	KS L 2514

Thickness	1.5Mil/2Ply	
Shading Coefficient	0.65	KS L 2016
Solar Heat Gain Coefficient (SHGC)	0.57	KS L 2514
Scratch Resistant	>2H	ASTM D3363
Adhesion of Hard-Coated Surface	5B (0% peel-off)	ASTM D3359

# GLASSTINT-Pender50

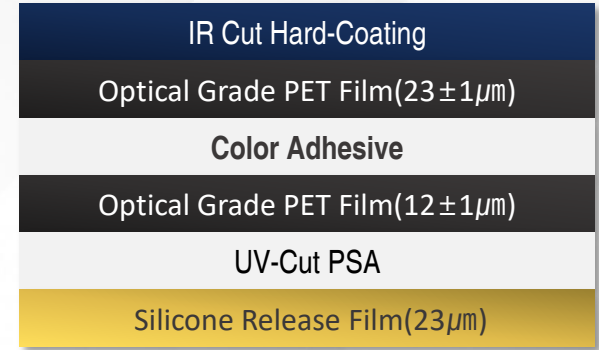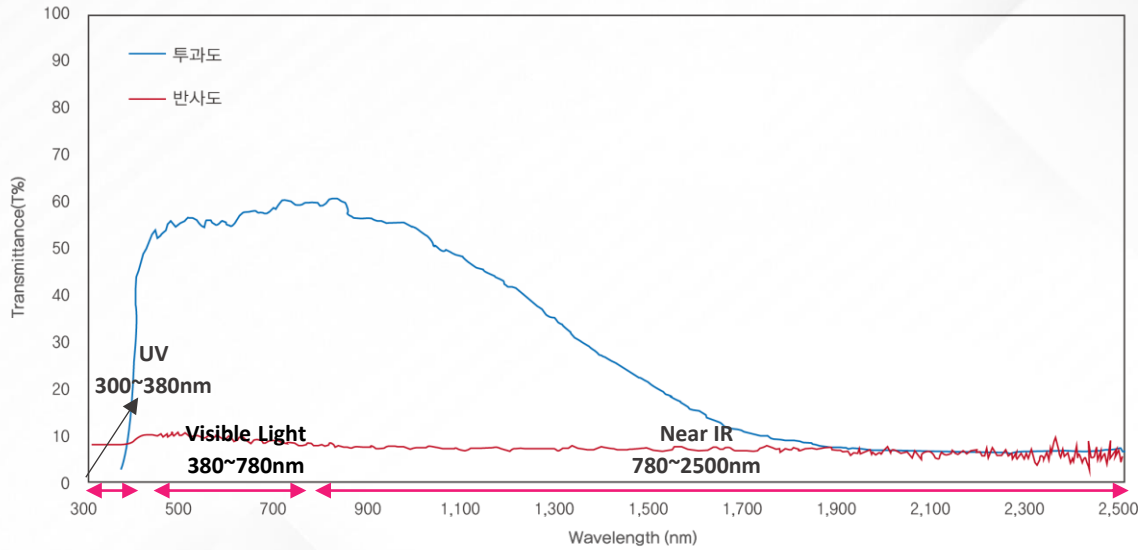

Visible Light Transmitted		54%	KS L 2514
Visible Light Reflected		6.9%	KS L 2514
Solar Heat	Transmitted	47.5%	KS L 2514
	Reflected	5.5%	
	Absorbed	47%	
IR Rejected	900~1000nm	46%	KS L 2514
	780~2500nm	79%	
UV Rejected		99%↑	KS L 2514
Total Solar Energy Rejected (TSER)		41%	KS L 2514

Thickness	1.5Mil/2Ply	
Shading Coefficient	0.73	KS L 2016
Solar Heat Gain Coefficient (SHGC)	0.64	KS L 2514
Scratch Resistant	>2H	ASTM D3363
Adhesion of Hard-Coated Surface	5B (0% peel-off)	ASTM D3359